



KEY FUNCTION

T12 Dual color panel



- ☰ Turn on/off all zone light.
- ☼ Brightness, 10 levels.
- ☺ Color temperature wheel.
- 1 2 3 4


Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light.
Short press multiple zone key fastly, will select multiple zone synchronously.
4 zone control separately or synchronously, each zone could control multiple receivers.

Contrôleur tactile DMX - 4 zones - CCT

Ref. SK-T12

Le panneau de contrôle tactile DMX encastré 4 zones offre un contrôle complet de l'éclairage pour les luminaires LED CCT 100-240V. Il peut fonctionner en tant que master DMX512 ou télécommande RF. Son élégante interface tactile en verre à haute sensibilité comprend une roue chromatique pour des réglages précis, ainsi que des touches tactiles avec indicateurs LED. Il est possible de régler la luminosité, la saturation, la vitesse dans les scènes et les modes dynamiques, etc.

Mechanical Structures and Installations

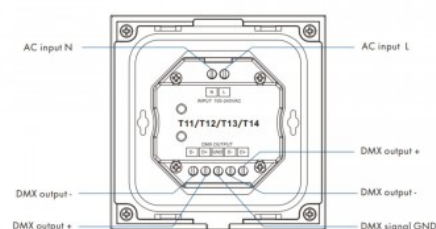

Caractéristiques du prod

uit	
null	null
Intensité variable	Oui
Tension nominale (V)	100-240V AC
Couleur	CCT
Connectivité	DMX, RF
Emplacement	Encastrable
Dimensions (mm) LxIxh	86 x 86 x 33
Poids (g)	0.181
Matériau	Verre
Extérieur	Non
IP	IP20
Certificats	ROHS, CE
Garantie	Selon garantie légale : 3 ans

